

Harrier™ Electronic Injection Rate Controllers

Closely control and monitor chemical use and collect critical operating information for reducing costs and improving processes. Its easy, efficient and productive – saving you time and money.

Accurate Control

Simple user interface for setup and control. Enter your desired injection rate and let Graco do the rest!

Office or Remote Access

The Harrier+ control includes remote connectivity, allowing you to monitor, control and calibrate your system away from your injection site via cellular or ModBus.

Notifications

Easily monitors your system for control, troubleshooting, maintenance needs and alerts.

Minimize Waste

Patent pending adaptive flow control technology maintains a consistent injection rate, regardless of system variables, reducing waste and costs.

System Control

Multiple inputs for system controls allow you to only run when it's necessary.

Choose the model that fits your needs:



Harrier LT
and Harrier

Harrier LT and Harrier


- Used for DC pumps
- Control injection rates via timer or cycle count
- ETL listed for electrical safety: UL 508 and CSA 22.2 No. 14

Harrier+

- Used for AC and DC pumps
- Control injection rates via timer, cycle count or flow control
- Easy to read display that operates at temperatures as low as -40° F (-40° C)
- CDMA and GSM cellular connectivity
- ETL listed for electrical safety: UL 508 and CSA 22.2 No. 14



Harrier+

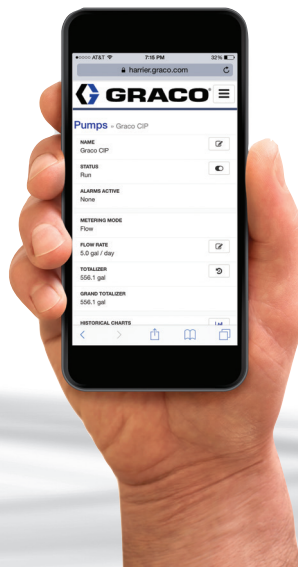

Control and monitor your systems
from your mobile device